

# Bicor™ MBR666 and OPPalyte™ MHR647 films

Deliver enhanced seal performance and higher humidity OW applications

# Benefits

- improved humidity seal retention compared with traditional acrylic coatings
- outstanding low pressure seal performance for overwrap applications
- excellent flavor and aroma barrier keeps products tasting and smelling fresh
- clear and opaque OPP films using solvent-free, water based coating technology



Two-side, modified acrylic-coated films deliver high seal performance to improve humidity resistance in overwrap (OW) formats.

# Protection

- acrylic coating provides odor barrier to retain flavor and aroma, keeping products tasting and smelling fresh
- combats unwanted external or pack-to-pack contamination
- OPPalyte™ MHR647 film has a higher core density to provide creasing resistance compared with lower density cavitated OPP films
- modified acrylic coating provides improved humidity seal retention and better LPS characteristics for excellent overwrap (OW), vertical and horizontal form fill seal (VFFS and HFFS) performance
- Bicor™ MBR666 films exhibit high clarity and gloss for excellent product visibility
- OPPalyte MHR647 film exhibits high opacity and whiteness for vivid design
- excellent stiffness allows direct use in un-laminated formats





# Performance

# **Promotion**




Bicor<sup>™</sup> MBR666 films can either be used in single web or in a lamination to themselves, depending on the stiffness required for the final application.

OPPalyte™ MHR647 film delivers an excellent balance between opacity, stiffness, appearance and packaging weight reduction.

With modified acrylic coatings on both sides that improve low pressure seal (LPS) strength and humidity heat seal resistance while retaining stable slip properties and excellent optical properties, these films are suited for products which include:

- soap bars
- dry fruits
- paper reams
- other products that need better seal performance than provided by traditional acrylic coatings in more humid conditions

#### Improved low pressure seal (LPS) performance




#### Improved LPS performance for OW

The modified acrylic coating provides a 15 to 20°C reduction of seal intitiation temperature (SIT) under LPS conditions.

Jindal Films data

#### Humidity seal resistance of various coatings

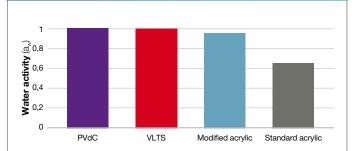

#### Improved acrylic humidity seal resistance

A special acrylic formulation was developed to provide humidity resistance for specific applications requiring the seal strength to be maintained in higher humidity conditions or for product with sligthly higher water activity (e.g. soap bars, some dry fruits).

Jindal Films data

#### **Count on Jindal Films**

The Films Business of Jindal Films is a leading global OPP film supplier with the broadest range of aqueous coated film solutions for the flexible packaging market. If you're looking to develop innovative flexible packaging solutions, try Bicor films from Jindal Films.

### Contact your Jindal Films representative for more information

## www.oppfilms.com

#### info@jindalfilms.com



© 2015 Jindal Films, the Jindal Films logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without Jindal Films' prior written authorization. To the extent Jindal Films authorized stishuting, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not prepresent, warrant, or otherwise guarantee the accuracy, reliability, or orapleteness of this informations reproduct or materials or implicity, the merchantability, fitness for a particular purpose, freedom from patern linfringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "lindal Films express of solar transports, companies, many with names including "Jindal" are each may include Jindal Films. Notal Films Aurope Sa f. I. or any companies affiliated with them in the products. There are a number of such affiliated companies, many with names including "Jindal" or "Films". Neither the use of these terms of convenience, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibili