

# Label-Lyte™ 15 LLG-101




Oriented Polypropylene Film

## Product Description

Label-Lyte 15 LLG-101 is a clear, one-side treated, biaxially oriented polypropylene film that is used in roll-fed labeling. This film can be laminated to itself (and other gauges of LLG-101) or applied as outer webs to other films. It is formulated with a proprietary non-migratory slip system. The treated clear layer is the intended print and laminating surface. The machinable high gloss layer is receptive to hot melt adhesive.

## Key Features

- Outstanding clarity and gloss
- Excellent ink adhesion with most solvent-based and water-based ink systems
- Excellent bond strength with most laminating adhesives
- Contains non-migratory slip system for outstanding performance on roll-fed labeling machines
- Good hot melt adhesion

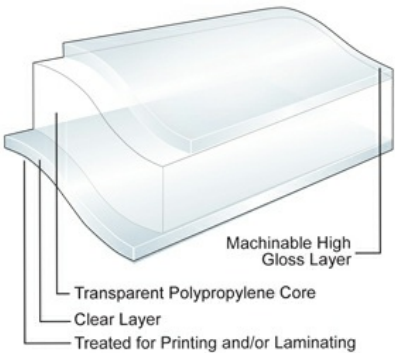

## General

### Availability

- ✓ Latin America
- ✓ North America
- ✓ South America

### Applications

- ✓ Dairy Products
- ✓ Dry Foods and Beverage Powders
- ✓ Beverage, Carbonated
- ✓ Beverage, Mineral Waters

### Uses

- ✓ Reel Fed Labels

### Appearance

- ✓ Clear/Transparent

### Processing Method

- ✓ Inner Web Adhesive Lamination
- ✓ Outer Web Adhesive Lamination
- ✓ Solvent Flexographic Printing
- ✓ Solvent Rotogravure Printing
- ✓ Surface Print Unsupported
- ✓ Water-based Flexographic Printing

## Properties

Property	Typical Value	Unit	Test Based On
Yield	72.1	m <sup>2</sup> /kg	Internal Method
Unit Weight	13.8	g/m <sup>2</sup>	Internal Method
Film Thickness	15	µm	Internal Method
Haze	2.0	%	Internal Method
Gloss			
Machinable Surface	88		Internal Method
Tensile Strength at Break			
510 mm/min pull rate, 50 mm jaw separation			
MD	124	Mpa	Internal Method
TD	241	Mpa	Internal Method
Elongation at Break			
510 mm/min pull rate, 50 mm jaw separation			
MD	153	%	Internal Method
TD	46	%	Internal Method
Dimensional Stability			
135°C / 275°F, 7 min			
MD	-5.0	%	Internal Method
TD	-5.0	%	Internal Method
Coefficient of Friction			
Machinable/Machinable	0.20		Internal Method
Wetting Tension			
Print Surface	0.85	receding cos θ	Internal Method

## Food Contact

Any further regulatory information on this product (i.e. Food Contact application, Presence/absence of substances, Reach, ...) are accessible on the below link: <https://www.jindalfilms.com/login-register-docmg/>

## Legal Statement

Contact your Jindal Films Customer Service Representative for potential food contact application compliance (e.g. FDA, EU, HPFB). This product is not intended for use in medical applications and should not be used in any such applications.

## Processing Statement

- The treated print surface of LLG-101 provides excellent ink adhesion and strong lamination bonds. There is no need to re-treat on press.
- The machinable surface provides good, hot melt adhesive anchorage.
- This film utilizes a non-migratory slip system, which provides consistent COF through all processing steps.

## Footnotes

1. Product may not be available in one or more countries in the identified Availability regions. Please contact your Sales Representative for complete country availability.

## Revision date

- October 10, 2013

© 2020 Jindal Films. Jindal Films, the Jindal Films' logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. You may not upload, display, publish, license, post, point to, frame, transmit or distribute either this document or its information, whether in whole or in part, without Jindal Films' prior written authorization. To the extent Jindal Films provides prior written authorization, the user may use the document or its information only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. Any data included herein may be based upon: analyses of representative samples and not the actual product shipped, typical values, or otherwise. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We base the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee the accuracy, reliability, or completeness of this information; nor do we warrant, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Virton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.