

Bicor™ 120 XRG-2

Oriented Polypropylene Film




Product Description

Bicor 120 XRG-2 is a one-side treated, one-side sealable OPP film that can be used as the inside web of a lamination where exceptional seal performance is required. The high-energy surface is intended as the print and laminating side.

Key Features

- Low MST, very broad seal range with excellent hot tack.
- High-energy surface for excellent ink adhesion and bond strengths in adhesive and extrusion laminations.
- Lap seals to coex sealants without thermal stripe.

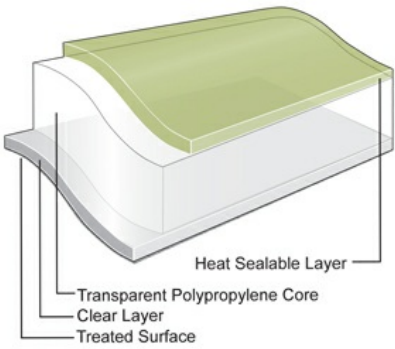

General

Availability

- ✓ Latin America
- ✓ North America
- ✓ South America

Features

- ✓ In Lamination Lap Sealable
- ✓ Very Broad Seal Range

Applications

- ✓ Biscuits/Cookie/Crackers
- ✓ Bakery
- ✓ Frozen Food
- ✓ Crisps and Snacks
- ✓ Ice Cream

Uses

- ✓ HFFS Flexible Packaging
- ✓ VFFS Flexible Packaging

Appearance

- ✓ Clear/Transparent

Processing Method

- ✓ Inner Web Adhesive Lamination
- ✓ Solvent Flexographic Printing
- ✓ Solvent Rotogravure Printing
- ✓ Surface Print Unsupported
- ✓ Water-based Flexographic Printing
- ✓ Inner Web Extrusion Lamination

Properties

Property	Typical Value	Unit	Test Based On
Yield	36.1	m ² /kg	Internal Method
Unit Weight	27.5	g/m ²	Internal Method
Film Thickness	30	µm	Internal Method
Haze	3.2	%	Internal Method
Gloss	82	Gloss Unit	Internal Method
Tensile Strength at Break			
<i>510 mm/min pull rate, 50 mm jaw separation</i>			
MD	131	Mpa	Internal Method
TD	283	Mpa	Internal Method
Elongation at Break			
<i>510 mm/min pull rate, 50 mm jaw separation</i>			
MD	182	%	Internal Method
TD	46	%	Internal Method
Dimensional Stability			
135°C / 275°F, 7 min			
MD	-4.0	%	Internal Method
TD	-3.0	%	Internal Method
Crimp Seal Strength			
<i>Treated/Treated</i>			
116°C, 0.1 MPa, 0.75 sec	450	g/2.5 cm	Internal Method
<i>Untreated/Untreated</i>			
116°C, 0.1 MPa, 0.75 sec	450	g/2.5 cm	Internal Method
Crimp Seal (MST)			
Untreated/Untreated	89	°C	Internal Method
Coefficient of Friction			
Untreated/Untreated	0.40		Internal Method
Wetting Tension			
Treated Surface	0.80	receding cos θ	Internal Method

Food Contact

Any further regulatory information on this product (i.e. Food Contact application, Presence/absence of substances, Reach, ...) are accessible on the below link: <https://www.jindalfilms.com/login-register-docmg/>

Legal Statement

Contact your Jindal Films Customer Service Representative for potential food contact application compliance (e.g. FDA, EU, HPFB). This product is not intended for use in medical applications and should not be used in any such applications.

Processing Statement

- An overlacquer is required for successful surface printing.

Footnotes

1. Product may not be available in one or more countries in the identified Availability regions. Please contact your Sales Representative for complete country availability.

Revision date

- October 10, 2013

© 2020 Jindal Films. Jindal Films, the Jindal Films' logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. You may not upload, display, publish, license, post, point to, frame, transmit or distribute either this document or its information, whether in whole or in part, without Jindal Films' prior written authorization. To the extent Jindal Films provides prior written authorization, the user may use the document or its information only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. Any data included herein may be based upon: analyses of representative samples and not the actual product shipped, typical values, or otherwise. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We base the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee the accuracy, reliability, or completeness of this information; nor do we warrant, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Virton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.