

Label-Lyte™ 38DL247

Oriented Polypropylene Film




Product Description

Super white opaque, high gloss, high yield and highly cavitated 5 layer BOPP film. It is designed for use in reel-fed wrap-around labelling applications where superior graphics are desired.

Key Features

- Outstanding opacity and whiteness
- Exceptional printability
- Excellent hot melt anchorage
- Excellent stiffness
- High tear and split resistance
- High resistance to elongation on labelling machine
- Good mold resistance
- High slip on untreated side of 38DL247 for optimised performance on the most demanding machines.

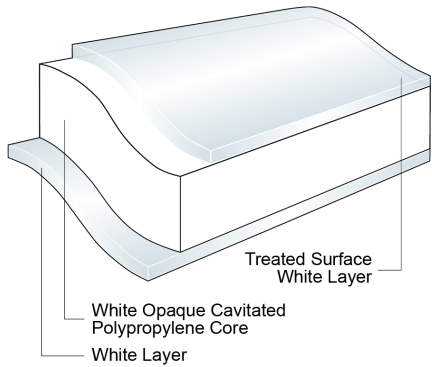

General

Availability

- | | | |
|------------------------|-----------------|-----------------|
| ✓ Latin America | ✓ North America | ✓ South America |
| ✓ Africa & Middle East | ✓ Asia Pacific | ✓ Europe |

Applications

- | | | |
|----------------------------|--------------------------|----------------------------|
| ✓ Dairy Products | ✓ Health and Beauty Care | ✓ Household and Detergents |
| ✓ Industrial | ✓ Beverage, Alcoholic | ✓ Beverage, Carbonated |
| ✓ Beverage, Mineral Waters | | |

Uses

- ✓ Reel Fed Labels

Appearance

- ✓ White

Processing Method

- | | | |
|---------------------------------|----------------------------------|--------------------------------|
| ✓ Inner Web Adhesive Lamination | ✓ Solvent Flexographic Printing | ✓ Solvent Rotogravure Printing |
| ✓ Surface Print Unsupported | ✓ UV Offset Lithography Printing | ✓ UV Flexographic Printing |

Properties

Property	Typical Value	Unit	Test Based On
Yield	48.8	m ² /kg	Internal Method
Unit Weight	20.5	g/m ²	Internal Method
Film Thickness	38	µm	Internal Method
Gloss	70	Gloss Unit	Internal Method
Light Transmission	21.0	%	Internal Method
Whiteness Index	90		Internal Method
Tensile Strength at Break <i>200 mm/min pull rate, 120 mm jaw separation</i>			
MD	85.0	Mpa	Internal Method
TD	120	Mpa	Internal Method
Dimensional Stability 135°C / 275°F, 7 min			
MD	-3.0	%	Internal Method
TD	-3.0	%	Internal Method
Elongation at Break <i>200 mm/min pull rate, 120 mm jaw separation</i>			
MD	110	%	Internal Method
TD	40	%	Internal Method
Elastic Modulus			
MD	1200	Mpa	Internal Method
TD	1800	Mpa	Internal Method
Coefficient of Friction			
Untreated Surface	0.35		Internal Method

Food Contact

Any further regulatory information on this product (i.e. Food Contact application, Presence/absence of substances, Reach, ...) are accessible on the below link: <https://www.jindalfilms.com/login-register-docmg/>

Legal Statement

Contact your Jindal Films Customer Service Representative for potential food contact application compliance (e.g. FDA, EU, HPFB). This product is not intended for use in medical applications and should not be used in any such applications.

Processing Statement

- Treatment: Available treated outside

Footnotes

1. Product may not be available in one or more countries in the identified Availability regions. Please contact your Sales Representative for complete country availability.

Revision date

- March 12, 2021

© 2020 Jindal Films. Jindal Films, the Jindal Films' logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. You may not upload, display, publish, license, post, point to, frame, transmit or distribute either this document or its information, whether in whole or in part, without Jindal Films' prior written authorization. To the extent Jindal Films provides prior written authorization, the user may use the document or its information only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. Any data included herein may be based upon: analyses of representative samples and not the actual product shipped, typical values, or otherwise. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We base the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee the accuracy, reliability, or completeness of this information; nor do we warrant, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Vinton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.