


Bicor™ 150 ASB-X

Oriented Polypropylene Film



Product Description

Bicor ASB-X is a two-side coated, sealable OPP film designed for broad use in many applications, including overwrap, horizontal, and vertical packaging. This film is suitable as an unsupported web or in a lamination. It can be surface printed, reverse printed, or used unprinted.

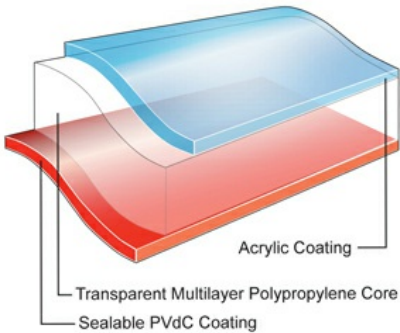

Key Features

- Outstanding optical properties
- Robust machinability
- Low and consistent COF
- Excellent flavor and aroma barrier
- Excellent heat seal strength and hot tack
- Very good moisture barrier
- Good oxygen barrier

General

Availability

<input checked="" type="checkbox"/> Latin America	<input checked="" type="checkbox"/> North America	<input checked="" type="checkbox"/> South America
---	---	---

Features

<input checked="" type="checkbox"/> Acrylic Coated	<input checked="" type="checkbox"/> Flavor & Aroma Barrier	<input checked="" type="checkbox"/> In Lamination Lap Sealable
<input checked="" type="checkbox"/> Gas Barrier	<input checked="" type="checkbox"/> Moisture Barrier	<input checked="" type="checkbox"/> Oxygen Barrier
<input checked="" type="checkbox"/> PVdC Coated	<input checked="" type="checkbox"/> Sealable PVdC Coated	

Applications

<input checked="" type="checkbox"/> Biscuits/Cookie/Crackers	<input checked="" type="checkbox"/> Box Overwrap	<input checked="" type="checkbox"/> Confectionery, Sugar
--	--	--

Uses

<input checked="" type="checkbox"/> Box Overwrap Flexible Packaging	<input checked="" type="checkbox"/> HFFS Flexible Packaging	<input checked="" type="checkbox"/> Pre-made Bags - Flexible Packaging
<input checked="" type="checkbox"/> VFFS Flexible Packaging		

Appearance

<input checked="" type="checkbox"/> Clear/Transparent		
---	--	--

Processing Method

<input checked="" type="checkbox"/> Cold Seal Adhesive	<input checked="" type="checkbox"/> Inner Web Adhesive Lamination	<input checked="" type="checkbox"/> Outer Web Adhesive Lamination
<input checked="" type="checkbox"/> Solvent Flexographic Printing	<input checked="" type="checkbox"/> Solvent Rotogravure Printing	<input checked="" type="checkbox"/> Surface Print Unsupported
<input checked="" type="checkbox"/> Water-based Flexographic Printing		

Properties

Property	Typical Value	Unit	Test Based On
Yield	27.7	m ² /kg	Internal Method
Unit Weight	36.1	g/m ²	Internal Method
Film Thickness	38	µm	Internal Method
Gloss	98	Gloss Unit	Internal Method
Haze	1.2	%	Internal Method
Tensile Strength at Break			
510 mm/min pull rate, 50 mm jaw separation			
MD	103	Mpa	Internal Method
TD	216	Mpa	Internal Method
Dimensional Stability			
135°C / 275°F, 7 min			
MD	-4.5	%	Internal Method
TD	-3.0	%	Internal Method
Crimp Seal Strength			
PVdC/PVdC			
127°C, 0.1 Mpa, 0.75 sec			
	590	g/2.5 cm	Internal Method
Crimp Seal (MST)			
PVdC/PVdC			
	88	°C	Internal Method
Coefficient of Friction			
Acrylic/Acrylic			
	0.24		Internal Method
Water Vapor Transmission Rate			
38°C, 90% RH			
	3.6	g/m ² /24 hr	Internal Method
Oxygen Transmission Rate			
23°C, 0% RH			
	70	cm ³ /m ² /24 hr	Internal Method

Food Contact

Any further regulatory information on this product (i.e. Food Contact application, Presence/absence of substances, Reach, ...) are accessible on the below link: <https://www.jindalfilms.com/login-register-docmg/>

Legal Statement

Contact your Jindal Films Customer Service Representative for potential food contact application compliance (e.g. FDA, EU, HPFB). This product is not intended for use in medical applications and should not be used in any such applications.

Processing Statement

- ASB-X is lap sealable to itself.
- Acrylic coating and its properties can be affected by extreme humidity and water condensation. Thorough testing is recommended when considering acrylic-coated films in refrigerated or frozen applications.
- Acrylic coating must be primed if used in extrusion lamination.
- With PVdC coating, priming or treating is recommended for stronger extrusion bonds.
- Acrylic is an excellent surface for water-based or solvent-based inks, adhesives and code-dating (cold wet or hot stamp) without treatment.
- To avoid blocking, ghosting, high residual solvents, or decreased sealability, converters should eliminate the use of slow solvents (cellosolve, glycol ethers, MIBK, butanol, etc) when printing on acrylic surfaces. The use of esters should be minimized.

Footnotes

1. Product may not be available in one or more countries in the identified Availability regions. Please contact your Sales Representative for complete country availability.
2. Dimensional stability is reported for uncoated base film.
3. Tested at 38°C (100°F)/100%RH, then calculated to 90%RH with .90 multiplier.
4. Sample dimensions and conditioning vary due to differences in equipment design.

Revision date

- July 16, 2014

using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Virton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.