

# Bicor™ 23LPX2

Preliminary


Oriented Polypropylene Film

## Product Description

Bicor LPX2 is a one-side treated, one-side sealable OPP film designed for use in a lamination. It can be laminated to Metallyte, HBS2, and itself to create lap sealable packages.

## Key Features

- Excellent machinability as the outer web of laminations in HFFS and VFFS applications
- Excellent solventless adhesive lamination and wet-out
- Excellent ink adhesion and bond strengths in adhesive, PVdC adhesive, and extrusion laminations
- Lap seals to OPP coex sealants
- Non-migratory slip system for consistent COF
- Optimal print dot structure and minimization of pin-holing
- Outstanding graphics in both four and multicolor process print applications

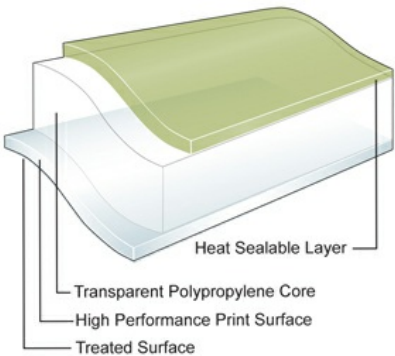

## General

### Availability

- ✓ Latin America
- ✓ North America
- ✓ South America

### Features

- ✓ In Lamination Lap Sealable

### Applications

- ✓ Biscuits/Cookie/Crackers
- ✓ Confectionery, Gum
- ✓ Confectionery, Sugar
- ✓ Bakery
- ✓ Crisps and Snacks

### Uses

- ✓ HFFS Flexible Packaging
- ✓ VFFS Flexible Packaging

### Appearance

- ✓ Clear/Transparent

### Processing Method

- ✓ Outer Web Adhesive Lamination
- ✓ Solvent Flexographic Printing
- ✓ Solvent Rotogravure Printing
- ✓ Surface Print Unsupported
- ✓ Water-based Flexographic Printing
- ✓ Outer Web Extrusion Lamination

## Properties

Property	Typical Value	Unit	Test Based On
Yield	48.3	m <sup>2</sup> /kg	Internal Method
Unit Weight	20.7	g/m <sup>2</sup>	Internal Method
Film Thickness	23	µm	Internal Method
Gloss			
Untreated Surface	87		Internal Method
Haze	2.7	%	Internal Method
Tensile Strength at Break			
510 mm/min pull rate, 50 mm jaw separation			
MD	113	Mpa	Internal Method
TD	209	Mpa	Internal Method
Dimensional Stability			
135°C / 275°F, 7 min			
MD	-7.0	%	Internal Method
TD	-6.0	%	Internal Method
Crimp Seal (MST)			
Untreated/Untreated	103	°C	Internal Method
Coefficient of Friction			
Slip Modified/Slip Modified	0.25		Internal Method
Wetting Tension			
Treated Surface	0.80	receding cos θ	Internal Method
Water Vapor Transmission Rate			
38°C, 90% RH	5.7	g/m <sup>2</sup> /24 hr	Internal Method

## Food Contact

Any further regulatory information on this product (i.e. Food Contact application, Presence/absence of substances, Reach, ...) are accessible on the below link: <https://www.jindalfilms.com/login-register-docmg/>

## Legal Statement

Contact your Jindal Films Customer Service Representative for potential food contact application compliance (e.g. FDA, EU, HPFB). This product is not intended for use in medical applications and should not be used in any such applications.

## Processing Statement

- This film contains a non-migratory slip system. Do not retreat.
- This film can be run on HFFS and VFFS machines.
- When using LPX2 as the inner web for demanding VFFS applications, thorough evaluation is recommended.
- This film is suitable for surface print, unsupported applications.

## Footnotes

1. Product may not be available in one or more countries in the identified Availability regions. Please contact your Sales Representative for complete country availability.
2. Tested at 38°C (100°F)/100%RH, then calculated to 90%RH with .90 multiplier.

## Revision date

- January 05, 2021

© 2020 Jindal Films. Jindal Films, Jindal Films, the Jindal Films' logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. You may not upload, display, publish, license, post, point to, frame, transmit or distribute either this document or its information, whether in whole or in part, without Jindal Films' prior written authorization. To the extent Jindal Films provides prior written authorization, the user may use the document or its information only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. Any data included herein may be based upon: analyses of representative samples and not the actual product shipped, typical values, or otherwise. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We base the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee the accuracy, reliability, or completeness of this information; nor do we warrant, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Virton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.