

# Label-Lyte™ 58LH532




Preliminary

Oriented Polypropylene Film

## Product Description

Label-Lyte 58LH532 is a 1 side top coated film designed for pressure sensitive label applications. The print top coated side provides an exceptional ink adhesion with with a broad range of ink systems where excellent appearance and graphics are desired. 58LH532 is also compatible with hot stamping and cold foil stamping systems. Label-Lyte 58LH532 is a super white opaque polypropylene film face stock with a proprietary cavitated core providing optimum yield and excellent opacity. The untreated backside layer, when treated, is offering a good base for applying adhesives.

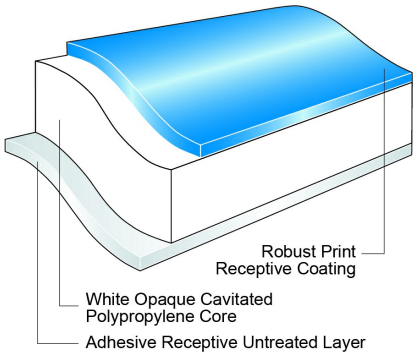

## Key Features

- Excellent whiteness and opacity
- Excellent compatibility with a broad range of ink systems, including UV flexo
- Excellent stiffness for automatic label dispensing

## General

### Availability

- ✓ Africa & Middle East
- ✓ Asia Pacific
- ✓ Europe

### Features

- ✓ Humidity Resistant

### Applications

- ✓ Health and Beauty Care
- ✓ Household and Detergents
- ✓ Industrial
- ✓ Beverage, Alcoholic
- ✓ Beverage, Carbonated
- ✓ Beverage, Mineral Waters

### Uses

- ✓ Pressure Sensitive Labels

### Appearance

- ✓ White

### Processing Method

- ✓ Solvent Flexographic Printing
- ✓ Solvent Rotogravure Printing
- ✓ Surface Print Unsupported
- ✓ Water-based Flexographic Printing
- ✓ Thermal Transfer printing
- ✓ UV Offset Lithography Printing
- ✓ UV Flexographic Printing
- ✓ UV Letterpress Printing
- ✓ UV Screen Printing
- ✓ Cold Foil Stamping
- ✓ Hot Stamping

## Properties

Property	Typical Value	Unit	Test Based On
Yield	23.2	m <sup>2</sup> /kg	Internal Method
Unit Weight	43.1	g/m <sup>2</sup>	Internal Method
Film Thickness	58	µm	Internal Method
Gloss			
Print Surface	63		Internal Method
Light Transmission	22.0	%	Internal Method
Tensile Strength at Break			
200 mm/min pull rate, 120 mm jaw separation			
MD	95.0	Mpa	Internal Method
TD	185	Mpa	Internal Method
Dimensional Stability			
135°C / 275°F, 7 min			
MD	-4.0	%	Internal Method
TD	-2.0	%	Internal Method
Elongation at Break			
200 mm/min pull rate, 120 mm jaw separation			
MD	170	%	Internal Method
TD	55	%	Internal Method
Elastic Modulus			
MD	1600	Mpa	Internal Method
TD	2600	Mpa	Internal Method

## Food Contact

Any further regulatory information on this product (i.e. Food Contact application, Presence/absence of substances, Reach, ...) are accessible on the below link: <https://www.jindalfilms.com/login-register-docmg/>

## Legal Statement

Contact your Jindal Films Customer Service Representative for potential food contact application compliance (e.g. FDA, EU,HPFB). This product is not intended for use in medical applications and should not be used in any such applications.

## Processing Statement

- Adhesive side of 58LH532 is untreated, treatment required as part of the converting process while applying the adhesive to ensure a good adhesive anchorage
- 58LH532 rolls are sensitive to damage from improper handling. The use of a sling is recommended. Avoid direct web contact with the floor or a pallet. Rolls should not be dropped or rolled.
- Print surface of this film is coated and provide outstanding converting performance. Therefore, treatment as part of the converting process is not recommended on the print side.
- Prior testing and consultation with the ink and pressure-sensitive adhesive suppliers are recommended to ensure compatibility.
- The coated print surface may not be compatible with all release liners. Compatibility testing is strongly recommended.
- This film is not intended for use in unprinted zigzag applications, in which the coated print surface is in contact with itself.

## Footnotes

1. Product may not be available in one or more countries in the identified Availability regions. Please contact your Sales Representative for complete country availability.

## Revision date

- August 24, 2021

© 2020 Jindal Films. Jindal Films, the Jindal Films' logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. You may not upload, display, publish, license, post, point to, frame, transmit or distribute either this document or its information, whether in whole or in part, without Jindal Films' prior written authorization. To the extent Jindal Films provides prior written authorization, the user may use the document or its information only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. Any data included herein may be based upon: analyses of representative samples and not the actual product shipped, typical values, or otherwise. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We base the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee the accuracy, reliability, or completeness of this information; nor do we warrant, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Virton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.