

## NNH

### Non Sealable Transparent Film

#### Applications

Coldseal release film for high gloss lamination.


#### Description

NNH is a high gloss, non heat sealable, both sides treated, transparent OPP film.

#### Product features

- Excellent transparency and high gloss
- Non heat sealable
- NNH can be laminated and printed
- Good antistatic properties

Gloss layer, flame treated  
Transparent layer  
Gloss layer, Corona treated

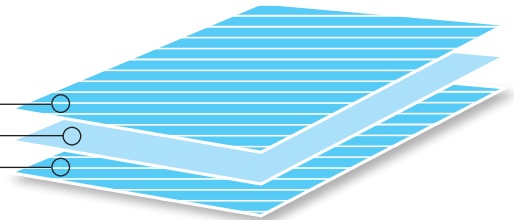

### Technical Data (Typical Value)

Properties	NNH 20	Unit	Measuring method
<b>Unit weight</b>	18.2	g/m <sup>2</sup>	ISO 4591
<b>Average yield</b>	54.9	m <sup>2</sup> /kg	ISO 4591
<b>Haze</b>	1.7	%	ASTM D 1003
<b>Gloss</b>			
At 20° (treated side)	120	gloss unit	ISO 2813
<b>Coefficient of friction</b>			
Film/film, dynamic	0.4	-	ISO 8295
* <b>Surface tension treated side</b>	≥ 36	mN/m	ISO 8296
<b>Tensile strength</b>			
Machine direction	130	N/mm <sup>2</sup>	ISO 527
Transverse direction	300	N/mm <sup>2</sup>	ISO 527
<b>Elongation at break</b>			
Machine direction	170	%	ISO 527
Transverse direction	45	%	ISO 527
<b>Water vapour permeability</b>			
23°C / 85% r.h.	1.4	g/m <sup>2</sup> /d	ASTM F 1249
38°C / 90% r.h.	6.8	g/m <sup>2</sup> /d	ASTM F 1249

\* within 6 months after production

### Availability

Dimensions	NNH 20	Unit
<b>Reel length</b>		
Standard length (6-times)	21 000	m
<b>Max. reel outside diameter</b>		
Core diameter 152 mm	775	mm

Max. reel width: 2000 mm (widths > 2000 mm on request)

#### Storage

The reels should be kept in their original packaging until used. It is recommended that films are stored below 30°C in order to minimize deterioration of film properties. All films should be allowed to reach operation room temperature for 24 hours before use.  
\* The treatment level declines with time.

#### Food Approval

Treofan NNH is in compliance with current US FDA and European food contact regulation.

#### Health and Safety

Treofan NNH has specially been developed for packing foods and meets the specific requirements on health and safety.

The figures and data provided in this datasheet are consistent with the current state of our knowledge and are intended to provide general information about our products and their applications. The data collected in this document is for non-binding information purposes only. The exact quality of the products is detailed in the technical specifications which are sent together with the order confirmation. Any existing commercial rights or patents must be observed. Certified according to DIN EN ISO 9001, DIN EN ISO 50001, BRC IOP, AIB. Compliance with industrial health and safety standards. Treofan OPP films do not present any significant danger to health and safety in the workplace, provided they are used for the intended purpose in accordance with conventional practices and that health and safety regulations are observed. Relevant guidelines can be found in our safety information.

**Treofan Germany GmbH & Co. KG**  
Am Prime Parc 17  
65479 Raunheim / Germany  
t +49 (0) 6142 200 3000  
f +49 (0) 6142 200 3202  
e info@treofan.com