

TREOFAN™ EWR 57.0

Oriented Polypropylene Film

Jindal
Films


TREOFAN

Product Description

Specifically developed for in mould labels for PP and PE** injection moulding. EWR is a white OPP film, treated on both sides, one side is matt, one side glossy.

Key Features

- Good antistatic properties, web flatness and machineability
- Offset sheet fed printing with UV curing and oxidative drying inks. For offset printing the film should be stored at 20-25°C, 50-60% rh for a min. of 24 hours
- Gravure and UV-flexo printing
- For reel to reel printing with UV inks, inline Corona treatment is strongly recommended

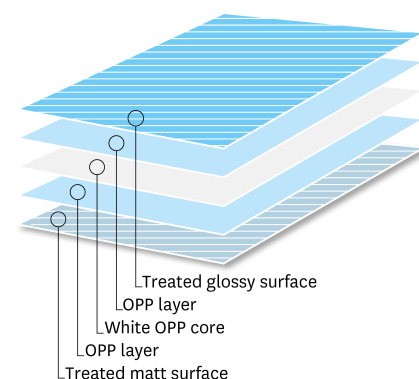

General

Availability

- ✓ North America
- ✓ South America
- ✓ Africa & Middle East
- ✓ Asia Pacific
- ✓ Europe

Applications

- ✓ Ice Cream
- ✓ Industrial
- ✓ Food/ Meat Packaging

Uses

- ✓ In Mould Labels

Appearance

- ✓ White

Processing Method

- ✓ Solvent Flexographic Printing
- ✓ Solvent Rotogravure Printing
- ✓ Digital Offset (HP Indigo) Printing
- ✓ UV Offset Lithography Printing
- ✓ UV Flexographic Printing
- ✓ Conventional Offset Lithography Printing

Properties

Property	Typical Value	Unit	Test Based On
Yield	18.6	m ² /kg	Internal Method
Unit Weight	53.8	g/m ²	Internal Method
Film Thickness	56	µm	Internal Method
Density	0.96	kg/dm ³	Internal Method
Tensile Strength at Break			
MD	120	Mpa	Internal Method
TD	210	Mpa	Internal Method
Elongation at Break			
MD	180	%	Internal Method
TD	30	%	Internal Method
Treatment			
higher treated side			
Treated Surface	36-40	dyne/cm	Internal Method

Food Contact

Any further regulatory information on this product (i.e. Food Contact application, Presence/absence of substances, Reach, ...) are accessible on the below link: <https://www.jindalfilms.com/login-register-docmg/>

Legal Statement

Processing Statement

Storage: The reels should be kept in their original packaging until used. It is recommended that films are stored below 30°C in order to minimize deterioration of film properties. All films should be allowed to reach operation room temperature for 24 hours before use.

*The treatment level declines with time.

**In case a PE injection plastic melt is used, we recommend to perform an extensive customer validation to ensure the film will be suitable with the associated injection moulding process conditions.

Revision date

- June 29, 2020

© 2020 Jindal Films. Jindal Films. Jindal Films, the Jindal Films' logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. You may not upload, display, publish, license, post, point to, frame, transmit or distribute either this document or its information, whether in whole or in part, without Jindal Films' prior written authorization. To the extent Jindal Films provides prior written authorization, the user may use the document or its information only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. Any data included herein may be based upon: analyses of representative samples and not the actual product shipped, typical values, or otherwise. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We base the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee the accuracy, reliability, or completeness of this information; nor do we warrant, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Virton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.